

THE ORIGINAL
Feterl®
SERVICE BODIES

Established in 1988

by  **TEAMCO**®
INC

www.teamcoinc.com



**BUILT FOR
RELIABILITY
ENGINEERED TO
PERFORM**

Quality, Reliability, Power...

Feterl Service Body Features & Options



Equipped with Hydraulic Powered Air Compressor and Wireless Proportional Controlled Crane




LED Cabinet Lighting with Soft-stop Gas Shock Door Holders



Large 30" Work Deck with Full Width Compartment, Receiver Hitch and Trailer Lights



Single Panel Doors with Stainless Steel Internal Hinges

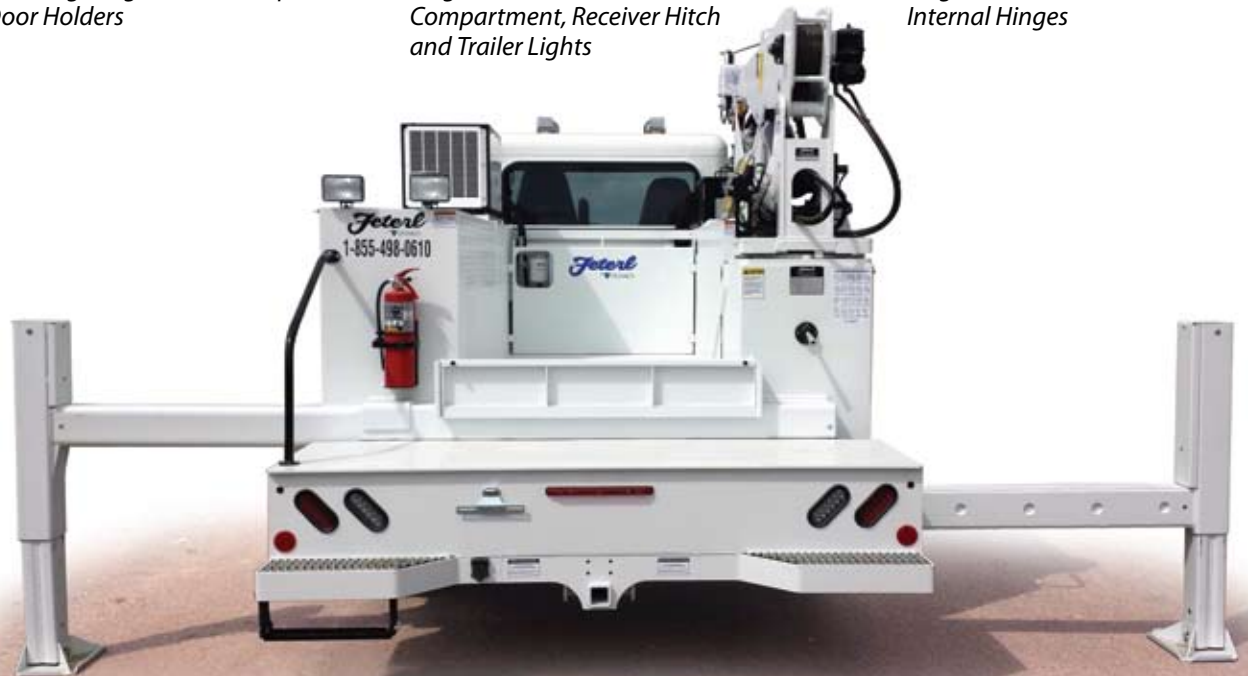

- Dual Rear Extending Outriggers for added Stability - Standard on Models 8000 and larger.
- Large Landing Pads
- No Exposed Hydraulic Hoses or Cylinder Rams

Standard Equipment and Specifications

CRANE MODELS	6000	8000	10000	12000	14000
Weight	1650 lbs	2400 lbs	2550 lbs	2550 lbs	3100 lbs
Storage Dimensions	24" W, 36" H, 13'7" L	25" W, 46" H, 14'10" L	25" W, 47" H, 14'10" L	25" W, 47" H, 14'10" L	28" W, 54" H, 15'5" L
Base Plate Dimensions	20-1/2" X 23-1/2"	24" X 24"	24" X 24"	24" X 24"	24" X 24"
Horizontal Reach	12' to 20'	13-1/2' to 22-1/2'	13-1/2' to 22-1/2'	13-1/2' to 22-1/2'	14' to 23'
Vertical Reach (Above Base Plate)	-1' to 22'	-1' to 24-1/2'	-1' to 25'	-1' to 25'	-1' to 26'
Cable Reach at Max Extension Above Base Plate	70'	67'	66'	66'	65'
Cable Reach at Max Extension (Double Line)	34'	32'	32'	32'	31'
Boom Elevation	-10° to 85°	-8° to 80°	-8° to 80°	-8° to 80°	-8° to 80°
Rotation	370°	370°	370°	370°	370°
Cable	3/8" IWRC	3/8" IWRC	1/2" IWRC	1/2" IWRC	1/2" IWRC
Cable Length	95'	95'	95'	95'	95'
Winch Speed (Single Line Pull)	20 to 25 ft/min	20 to 25 ft/min	17 to 22 ft/min	17 to 22 ft/min	13 to 17 ft/min
Winch Speed (Double Line Pull)	10 to 12-1/2 ft/min	10 to 12-1/2 ft/min	8-1/2 to 11 ft/min	8-1/2 to 11 ft/min	6-1/2 to 8-1/2 ft/min
Chassis Requirement (Recommended)	19,500 GVW	26,000 GVW	26,000 GVW	33,000 GVW	33,000 GVW

NOTE: TEAMCO INC. Reserves the right to change the above specifications at its own discretion.



Optional Pole Lights



Optional Tool Boxes Available



Lube and EVAC Tanks (Stationary or Skid Mount)



Wireless Remote



Lube and EVAC Systems Available

Call Toll Free: 855-498-0610



19,500 GVW - 84" CA. (Model 6000)



26,000 GVW - 84" CA. (Model 8000)



33,000 GVW - 120" CA. (Model 10,000)



Custom Designed Bodies for Tandem Chassis

Standard Features

- 10 Ga. Galvanneal
- Isolated Crane Tower
- Compartment Interiors sprayed with bed liner material
- Pressurized Compartments
- Power In & Out Outriggers
- Wireless Crane Controls
- Automotive Type Weather Stripping
- Full Length Drip Rails
- Fire Extinguisher
- Flush Mount LED Lighting
- LED Compartment Lighting
- Large Work Bench (18" or 30")
- In-Deck Tie Downs
- Concealed Door Hinges
- Stainless Steel Door Hinges
- Smooth Sides
- 50" Wide Cargo Area
- Safety Hand Rail & Step
- Adjustable Shelves
- Interlocking Substructure
- Crane Overload Protection System
- "Gang Lock" secures both top & bottom of doors on both sides from one location on a standard body
- Rubberized Under Coating
- Large Outrigger Pads

Contact factory for many other available options.
Will mount Service Body on new or used truck chassis.



Tel: 605-498-0610 • Fax: 605-498-0609
27065 Kerslake Pl. • Tea, SD 57064
www.teamcoinc.com

Call Toll Free: **855-498-0610**